

## MICO+ 4.10 ELEC AUX CIRCUIT, 4 CHANNELS


IN: 24VDC OUT: 24V/4-6-8-10ADC

MICO+ 4.10  
4 channels  
Current adjustment 4, 6, 8, 10 A


Fire protection (EN 60950-1) Operating voltage protection (EN 61131-2)

### [Link to Product](#)

#### Illustration

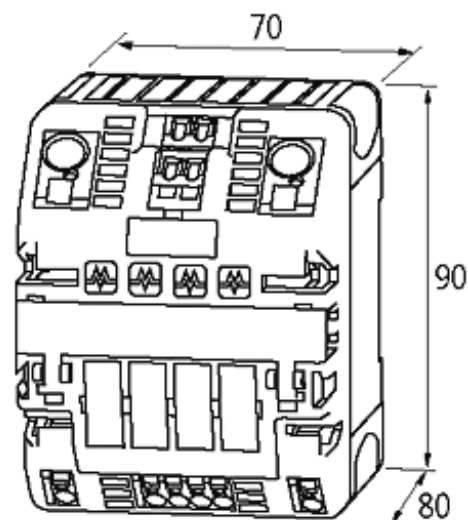

stay connected

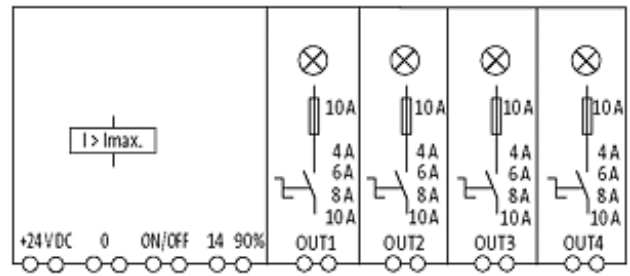

Product may differ from Image

### Approvals



### Input

Operating voltage 24 V DC (18...30 V DC)

### Control inputs

Input voltage (ON) 10...30 V DC

Remote start (OFF) 10...30 V DC

Impulse length (ON) min. 20 ms

### Control outputs

Group alarm output max. 20 mA; high: all channels ON; low: not all channels ON

Early warning (90%) max. 20 mA; high: one channel over 90%; low: all channels under 90%

### General data

Connection Spring clamp terminals

Input terminals 2 × 16 mm<sup>2</sup>

Output terminals per output 2 × 1.5 mm<sup>2</sup>

Alarm terminals 2.5 mm<sup>2</sup>

Bridging concept two sides, with spring clamp terminals or bridge set (max. 40 A)

Mounting method DIN-rail mountable TH35 (EN 60715)

Dimensions H × W × D 90×70×80 mm

Temperature range 0...+55 °C (storage temperature -40...+80 °C)

### Output

Current adjustment 4 A, 6 A, 8 A, 10 A, by countersunk rotary switch, sealed

Inrush capacity max. 20 mF (per channel)

### Commercial data

country of origin CZ

customs tariff number 85363010

EAN 4048879328944

eClass 27141901

Packaging unit

1