

Cable ties
Accessories

BBC Cellpack

Easy handling and safe assembly.

We connect your energy

www.cellpack.com

BBC Cellpack cable ties and accessories can be used in a flexible way and therefore represent by far the best solution of a closure system. Whether used in production facilities or in industry, hobby or sport - the innovative cable ties are characterised by their high functionality and their robust or specially designed workmanship. Resistant to alkaline earths, mould, oil, diluted acids and alkalis. Stabilized against UV rays (colour black), halogen-free, flame-retardant and silicone-free. Discover our cable tie product portfolio!

KS | Cable ties Standard



KSMZ | Cable ties with metal latch



KSWO | Cable ties reusable



KZB | Fastening element for cable ties



MDKS | Plastic dowels for cable ties



KS
Cable ties standard

Characteristics

- Smooth, rounded edges for safe and easy handling and assembly
- Internal gearing and rounded-off end to facilitate take-up, insertion and tightening
- Resistant to alkaline earth elements
- Resistant to mould and oil
- Stabilized against UV rays (colour: Black)
- Resistant to dilute acids and alkalis
- Halogen-free
- Flame retardant
- Silicone-free

Application/Suitability

- Bundling
- Affixing

Note

- Dimension tolerance $\pm 5\%$

Material

- Polyamid 6.6 1 kg = 9.81 N under standard conditions

Test standards

- EN 62275




Storage conditions/Shelf life

- Ideal storage conditions are at 23 °C and 50 % relative humidity
- After opening the bag, cable ties must be used rapidly

Scope of delivery

- 1 PU cable ties



Technical Data	Value
Flammability rating	UL94 V2
Mounting temperature	-5 °C up to +40 °C
Operation temperature	-40 °C up to +85 °C

Type	Colours	Width mm	Length mm	min. holding force N	max. bundle-Ø mm	PU pieces	Art.-No.	
KS	2.5/100	Black	2,5	100	88	24	100	146408
	2.5/100	Natural	2,5	100	88	24	100	146409
	2.5/135	Black	2,5	135	88	35	100	146453
	2.5/135	Natural	2,5	135	88	35	100	146454
	2.5/200	Black	2,5	200	88	55	100	146412
	2.5/200	Natural	2,5	200	88	55	100	146414
KS	3.5/140	Black	3,5	140	176	36	100	146416
	3.5/140	Natural	3,5	140	176	36	100	146419
	3.5/200	Black	3,5	200	176	55	100	146450
	3.5/200	Natural	3,5	200	176	55	100	146452
	3.5/280	Black	3,5	280	176	80	100	146422
	3.5/280	Natural	3,5	280	176	80	100	146424
KS	4.5/200	Black	4,5	200	216	51	100	146426
	4.5/200	Natural	4,5	200	216	51	100	146428
	4.5/280	Black	4,5	280	216	76	100	146431
	4.5/280	Natural	4,5	280	216	76	100	146433
	4.5/360	Black	4,5	360	216	101	100	146434
	4.5/360	Natural	4,5	360	216	101	100	146435
KS	7.5/320	Black	7,5	320	588	88	100	146436
	7.5/320	Natural	7,5	320	588	88	100	146437
	7.5/360	Black	7,5	360	588	101	100	146438
	7.5/360	Natural	7,5	360	588	101	100	146440
	7.5/750	Black	7,5	750	588	220	100	146442
	7.5/750	Natural	7,5	750	588	220	100	146443
KS	9.0/780	Black	9,0	780	800	235	100	146448
	9.0/780	Natural	9,0	780	800	235	100	146449
KS	12.5/500	Black	12,5	500	1140	140	50	146444
	12.5/500	Natural	12,5	500	1140	140	50	146445
	12.5/1000	Black	12,5	1000	1140	300	50	146446
	12.5/1000	Natural	12,5	1000	1140	300	50	146447

KSMZ

Cable ties with metal latch

Characteristics

- For demanding applications
- Smooth, rounded edges for safe and easy handling and assembly
- Internal gearing and rounded-off end to facilitate take-up, insertion and tightening
- Resistant to alkaline earth elements
- Resistant to mould and oil
- Stabilized against UV rays (colour: Black)
- Resistant to dilute acids and alkalis
- Halogen-free
- Flame retardant
- Silicone-free

Application/Suitability

- Bundling
- Affixing

Note

- Dimension tolerance $\pm 5\%$

Material

- Polyamid 6.6 1 kg = 9.81 N under standard conditions

Test standards

- EN 62275




Storage conditions/Shelf life

- Ideal storage conditions are at 23 °C and 50 % relative humidity
- After opening the bag, cable ties must be used rapidly

Scope of delivery

- 1 PU cable ties



Technical Data	Value
Flammability rating	UL94 V2
Mounting temperature	-5 °C up to +40 °C
Operation temperature	-40 °C up to +85 °C

Type	Colours	Width mm	Length mm	min. holding force N	max. bundle-Ø mm	PU pieces	Art.-No.	
KSMZ	2.5/100	Black	2,5	100	135	24	100	369794
	2.5/100	Natural	2,5	100	135	24	100	369795
	2.5/200	Black	2,5	200	135	55	100	369796
	2.5/200	Natural	2,5	200	135	55	100	369797
KSMZ	3.5/140	Black	3,5	140	200	36	100	369798
	3.5/140	Natural	3,5	140	200	36	100	369830
	3.5/200	Black	3,5	200	200	55	100	369799
	3.5/200	Natural	3,5	200	200	55	100	369810
	3.5/280	Black	3,5	280	200	80	100	369811
	3.5/280	Natural	3,5	280	200	80	100	369812
	3.5/360	Black	3,5	360	200	101	100	369813
	3.5/360	Natural	3,5	360	200	101	100	369814
KSMZ	4.5/186	Black	4,5	186	350	51	100	369816
	4.5/186	Natural	4,5	186	350	51	100	369817
	4.5/290	Black	4,5	290	350	76	100	369819
	4.5/290	Natural	4,5	290	350	76	100	369820
	4.5/360	Black	4,5	360	350	101	100	369821
	4.5/360	Natural	4,5	360	350	101	100	369823
KSMZ	7.0/340	Black	7,0	340	600	95	50	369825
	7.0/340	Natural	7,0	340	600	95	50	369826
KSMZ	7.5/360	Black	7,5	360	700	101	50	369827
	7.5/360	Natural	7,5	360	700	101	50	369829

KSWO

Cable ties reusable

Characteristics

- Multiple reusability due to resetting option
- Internal gearing and rounded-off end to facilitate take-up, insertion and tightening
- Resistant to alkaline earth elements
- Resistant to mould and oil
- Stabilized against UV rays (colour: Black)
- Resistant to dilute acids and alkalis
- Halogen-free
- Flame retardant
- Silicone-free

Application/Suitability

- Bundling
- Affixing

Note

- Dimension tolerance $\pm 5\%$

Material

- Polyamid 6.6 1 kg = 9.81 N under standard conditions




Storage conditions/Shelf life

- Ideal storage conditions are at 23 °C and 50 % relative humidity
- After opening the bag, cable ties must be used rapidly

Scope of delivery

- 1 PU cable ties



Technical Data	Value
Flammability rating	UL94 V2
Mounting temperature	-5 °C up to +40 °C
Operation temperature	-40 °C up to +85 °C

Type		Colours	Width mm	Length mm	min. holding force N	max. bundle-Ø mm	PU pieces	Art.-No.
KSWO	7.5/200	Black	7,5	200	280	50	100	371762
	7.5/200	Natural	7,5	200	280	50	100	371761
	7.5/280	Black	7,5	280	280	76	100	371764
	7.5/280	Natural	7,5	280	280	76	100	371763
	7.5/360	Black	7,5	360	280	100	100	371766
	7.5/360	Natural	7,5	360	280	100	100	371765

KZB

Fastening element for cable ties

Characteristics


- Adhesive film to facilitate installation in hard-to-reach areas
- Resistant to water, cleaning agents and alcohol
- Conditionally resistant to aliphatic and aromatic solvents
- Self-extinguishing

Application/Suitability

- Affixing of cable ties
- Prefabrication or subsequent assembly e.g. of office equipment, lifts, motor vehicles and control cubicles

Material

- Polyamid 6.6

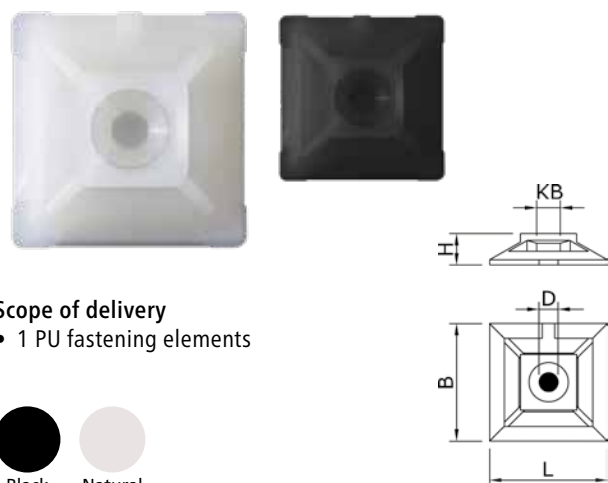

Scope of delivery

- 1 PU fastening elements



KB = max. width of the cable tie

Type		Colours	L mm	B mm	D mm	H mm	KB mm	PU pieces	Art.-No.
KZB2K	4	Black	19	19	4,75	4,5	4	100	371768
	4	Natural	19	19	4,75	4,5	4	100	146484
KZB2K	5	Black	27	27	4,75	6,0	5	100	371769
	5	Natural	27	27	4,75	6,0	5	100	146486

MDKS

Plastic dowels for cable ties

Characteristics

- With strong slats and a stable head for perfect hold
- Resistant to alkaline earth elements
- Resistant to mould and oil
- Stabilized against UV rays (colour: Black)
- Resistant to dilute acids and alkalis
- Halogen-free
- Flame retardant
- Silicone-free

Application/Suitability

- Affixing

Note



- Dimension tolerance $\pm 5\%$

Material

- Polyamid 6.6

Storage conditions/Shelf life

- Ideal storage conditions are at 23 °C and 50 % relative humidity
- After opening the bag, cable ties must be used rapidly

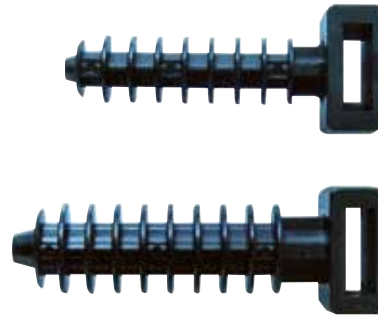

KB = max. width of the cable tie

Scope of delivery

- 1 PU Plastic dowels



Black

Technical Data	Value
Flammability rating	UL94 V2
Mounting temperature	-5 °C up to +40 °C
Operation temperature	-40 °C up to +85 °C

Typ3		L mm	HB mm	KB mm	H mm	D mm	Drilling mm	PU pieces	Art.-No.
MDKS	8/36	36	2,5	9	6,3	8	6	100	371611
	10/41	41	3,0	9	6,3	10	8	100	371612

BBC Cellpack GmbH BBC Cellpack Electrical Products

Carl-Zeiss-Straße 20 | 79761 Waldshut-Tiengen | Germany

+49 7741 6007-0

✉ electrical.products@cellpack.com



Further information about our products:
electricalproducts.cellpack.com

www.cellpack.com



Youtube
BBC Cellpack Channel



LinkedIn
BBC Cellpack Electrical Products



Web
www.cellpack.com